


SOUTH ELEVATION (E. MAIN ST.) SCALE 3/16" = 1'

Raceway Fits Inside 3" x 3/4" Deep Recessed Architectural Wall Feature

Plate Secured to Raceway w/ Corrosive Resist. #12 Flat Head Screws; Along Top & Bottom Flange @ 24" OC

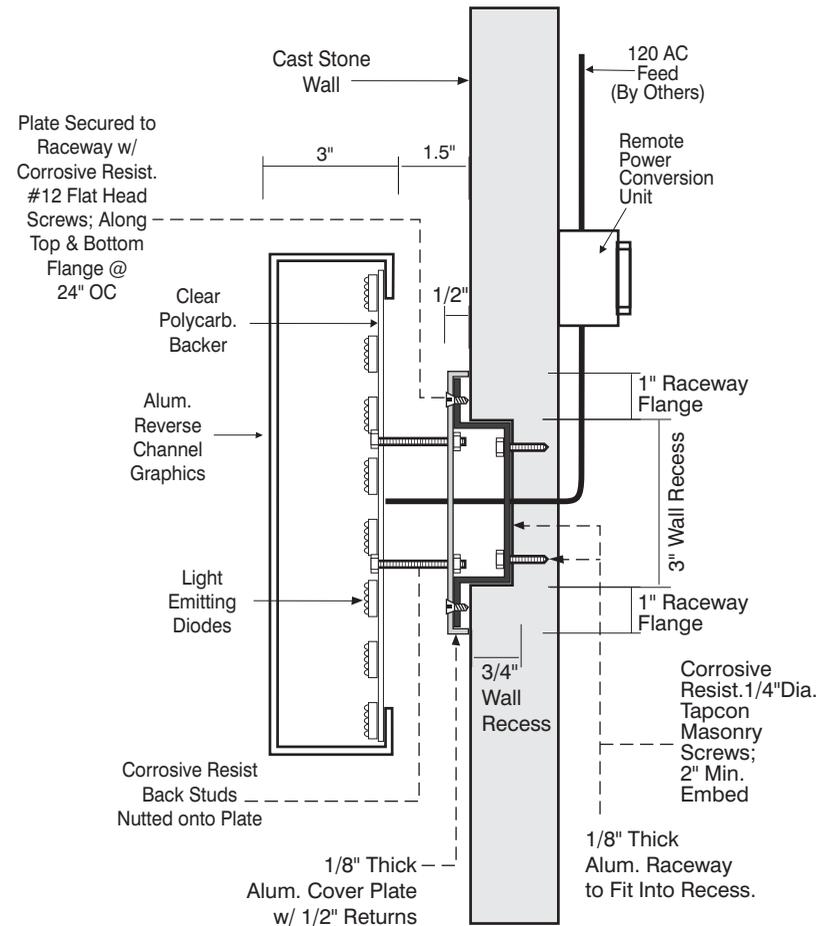

See Window Vinyl Drawing

See Blade Sign Drawing

G1 Halo-Illuminated Wall Letters All Information is Preliminary & Subject to Verification

REVERSE CHANNEL ALUMINUM LETTERS; 3" DEEP

HIGH OUTPUT LIGHT EMITTING DIODES (LED) CLUSTERS ARE HOUSED INSIDE EACH SHAPE. CLEAR PROTECTIVE POLYCARBONATE ON BACKS OF SHAPES.

LETTERS ARE MOUNTED TO 1/8" THICK ALUMINUM COVER PLATE W/ 1.5" +/- STAND-OFF SPACERS TO ALLOW LIGHT TO EMIT FROM BEHIND & AROUND EACH SHAPE.

COVER PLATE FITS OVER ALUMINUM "RACEWAY." RACEWAY BUILT TO FIT INSIDE RECESSED ARCHITECTURAL BUILDING FEATURE. COVER PLATE SECURED TO TOP & BOTTOM RACEWAY FLANGES W/ #12 GALV. FLAT HEAD SCREWS; SPACED AT 24" OC.

ALL WIRING BETWEEN LETTERS HOUSED IN RACEWAY

ALL WALL FASTENERS ARE CONCEALED INSIDE RACEWAY WITH SINGLE PENETRATION TO PRIMARY ELECTIC FEED. LED'S ARE POWERED BY 120 AC FEED BROUGHT TO SIGHT BY OTHERS.


SINGLE PENETRATION THRU WALL TO REMOTE POWER CONVERSION UNIT; HOUSED BEHIND MOUNTING WALL.

DOUBLE ROW OF 1/4" DIA. TAPCON SCREWS ARE STAGGERED ALONG LENGTH OF RACEWAY AT APPROX. 30" APART. MINIMUM EMBED AT 2".

EACH END OF RACEWAY IS CLOSED WITH ANGLED FLANGE.

Each End of Raceway is Closed w/ Angle Flange

COLORS----
 LETTERS OVERALL - SATIN BLACK.
 INSIDE OF LETTERS - BRIGHT WHITE.
 HALO ILLUMINATION - SOFT WHITE.
 COVER PLATE - PAINTED TO MATCH CAST STONE COLOR. SATIN FINISH.
 STAND OFF SPACERS - MATCH PLATE.

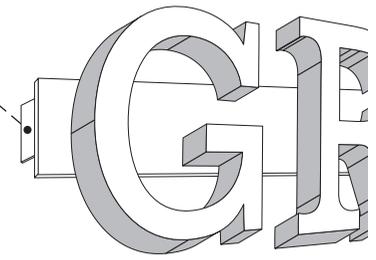

CLIENT APPROVAL _____ DATE _____



PRODUCTION ART REQUIRED
 Colors on Printed Documents May Vary

PROJECT NAME THE GRAMERCY
 LOCATION _____
 CITY COLUMBUS STATE _____

REVISION 10-4-16

SALES BMS
 DESIGN KD
 SIZE 14

DATE 9-30-16
 SCALE Noted
 PROJECT# 16519

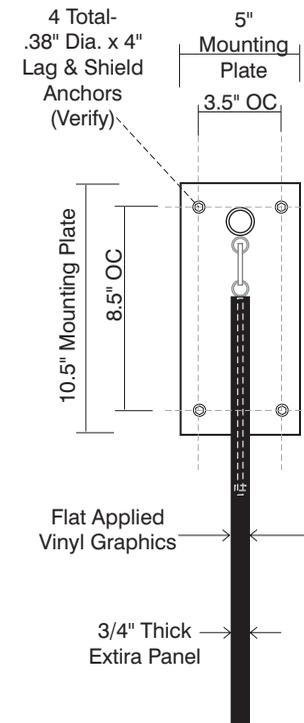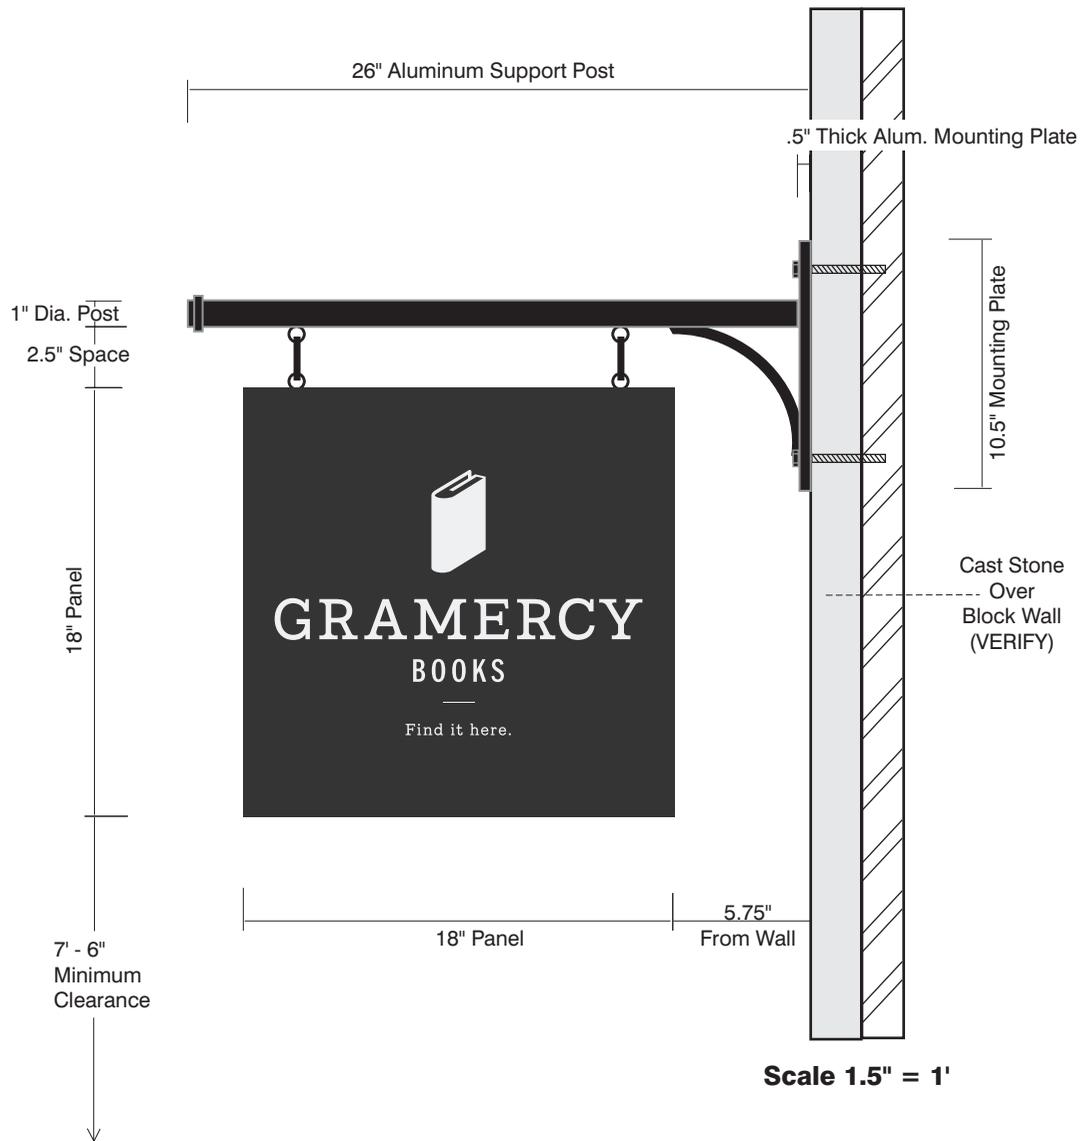

1 Total---Blade Sign


3/4" THICK EXTRIA PANEL WITH FLAT APPLIED VINYL GRAPHICS ON BOTH SIDES.

PANEL IS SUSPENDED ON WELDED EYEHOOKS WITH LOCKING LINK BETWEEN.



BRACKET - 1" DIAMETER SUPPORT POST THRU WELDED TO 1/2" THICK ALUMINUM MOUNTING PLATE. CURVED .38" THICK ALUMINUM SUPPORT PIECE ADDED TO BOTTOM OF POST.

PLATE IS MOUNTED FLUSH TO CAST STONE OVER BLOCK WALL WITH 4 TOTAL - 3/8" DIA. X 4" LAG & SHIELD ANCHORS. **VERIFY WALL MATERIALS TO CONFIRM MOUNTING METHOD. ADDITIONAL BLOCKING ADDED AS NEEDED.**

COLORS-----
BRACKET & ALL HARDWARE - SATIN BLACK.
PANEL & RETURNS - SATIN BLACK.
ALL GRAPHICS - WHITE

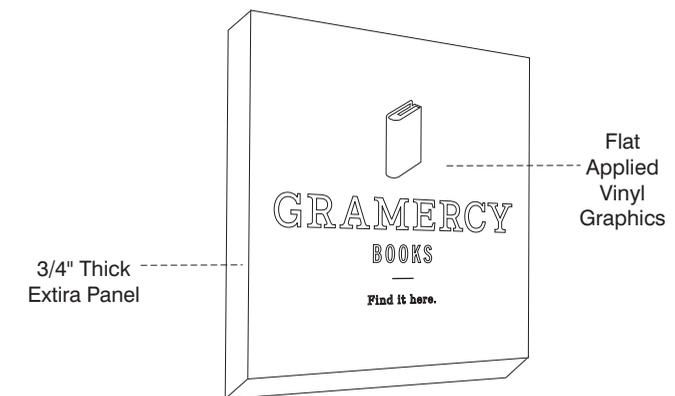

G3 D.F., Non-Illuminated Projecting Blade Sign

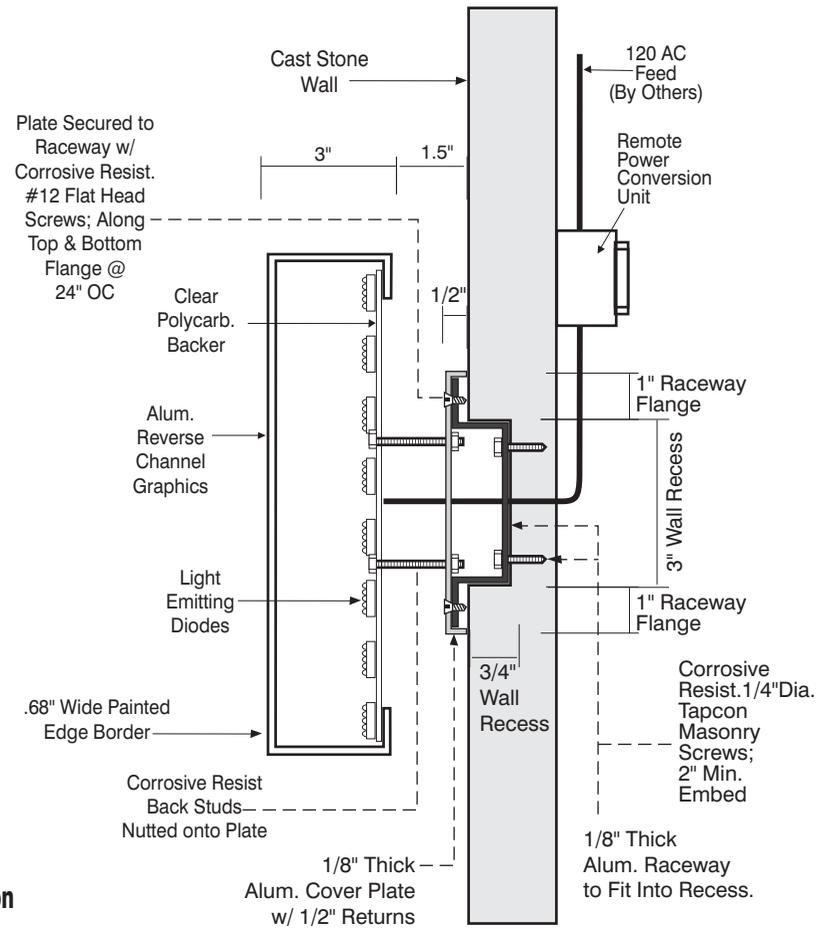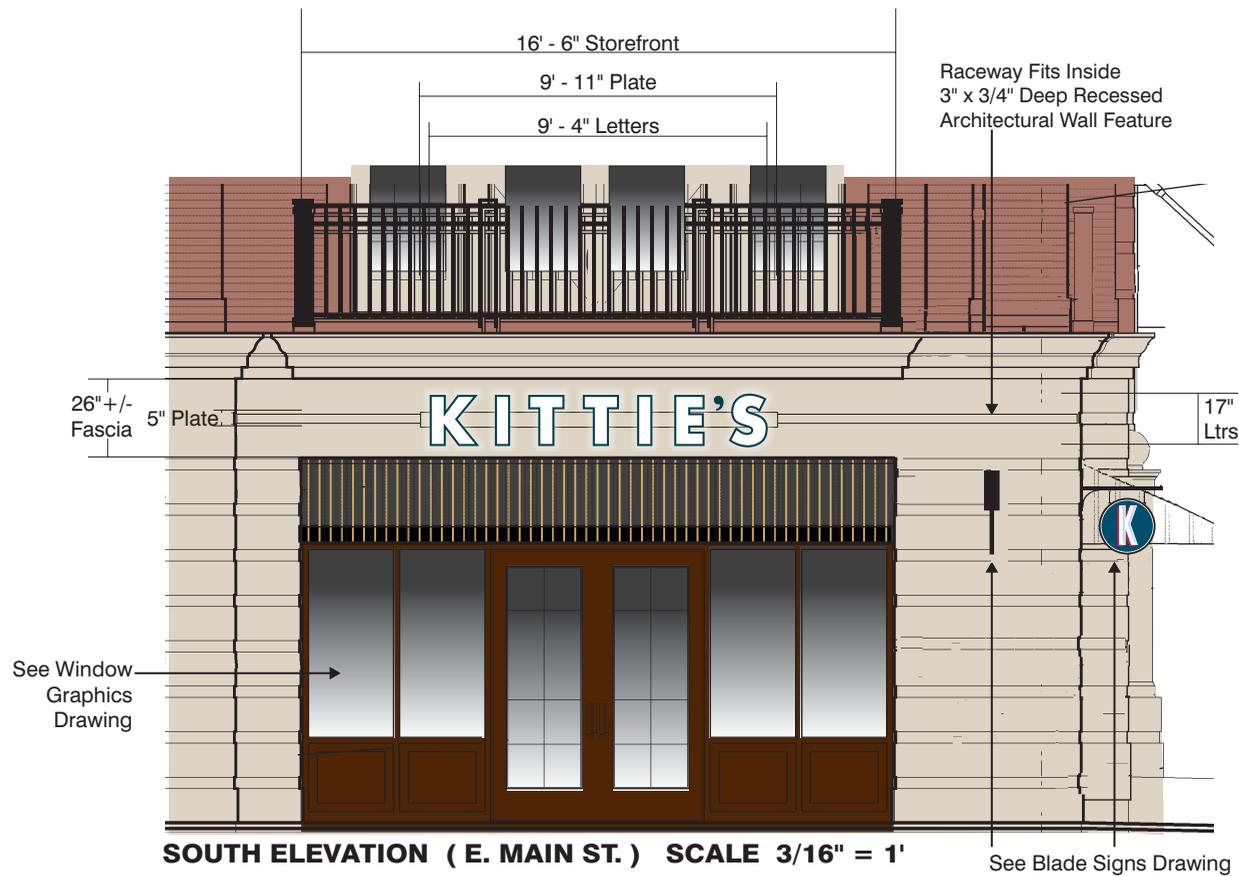

K2 Halo-Illuminated Wall Letters All Information is Preliminary & Subject to Verification

REVERSE CHANNEL ALUMINUM LETTERS; 3" DEEP.

HIGH OUTPUT LIGHT EMITTING DIODES (LED) CLUSTERS ARE HOUSED INSIDE EACH SHAPE. CLEAR PROTECTIVE POLYCARBONATE ON BACKS OF SHAPES.

LETTERS ARE MOUNTED TO 1/8" THICK ALUMINUM COVER PLATE W/ 1.5" +/- STAND-OFF SPACERS TO ALLOW LIGHT TO EMIT FROM BEHIND & AROUND EACH SHAPE.

COVER PLATE FITS OVER ALUMINUM "RACEWAY." RACEWAY BUILT TO FIT INSIDE RECESSED ARCHITECTURAL BUILDING FEATURE. COVER PLATE SECURED TO TOP & BOTTOM RACEWAY FLANGES W/ #12 GALV. FLAT HEAD SCREWS; SPACED AT 24" OC.

ALL WIRING BETWEEN LETTERS HOUSED IN RACEWAY

ALL WALL FASTENERS ARE CONCEALED INSIDE RACEWAY WITH SINGLE PENETRATION TO PRIMARY ELECTIC FEED. LED'S ARE POWERED BY 120 AC FEED BROUGHT TO SIGHT BY OTHERS.


SINGLE PENETRATION THRU WALL TO REMOTE POWER CONVERSION UNIT; HOUSED BEHIND MOUNTING WALL.



DOUBLE ROW OF 1/4" DIA. TAPCON SCREWS ARE STAGGERED ALONG LENGTH OF RACEWAY AT APPROX. 30" APART. MINIMUM EMBED AT 2".

EACH END OF RACEWAY IS CLOSED WITH ANGLED FLANGE.

* APOSTROPHE - NON -ILLUMINATED; 3/4" THICK EXTRA. PIN MOUNTED W/ 1/5" STAND-OFF SPACERS.

COLORS----
LETTERS - WHITE FACES w/ PMS#3035
DARK BLUE EDGE BORDER & RETURNS - SATIN FINISH.
INSIDE OF LETTERS - BRIGHT WHITE.
HALO ILLUMINATION - SOFT WHITE.
COVER PLATE - PAINTED TO MATCH CAST STONE COLOR. SATIN FINISH.
STAND OFF SPACERS - MATCH PLATE.

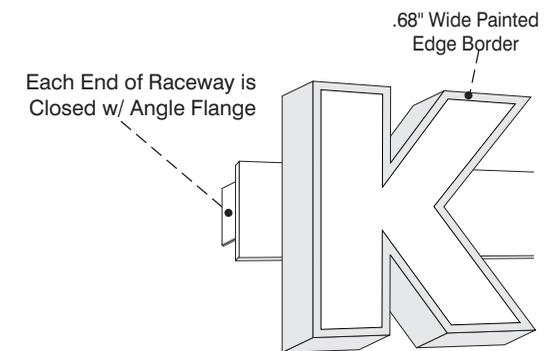

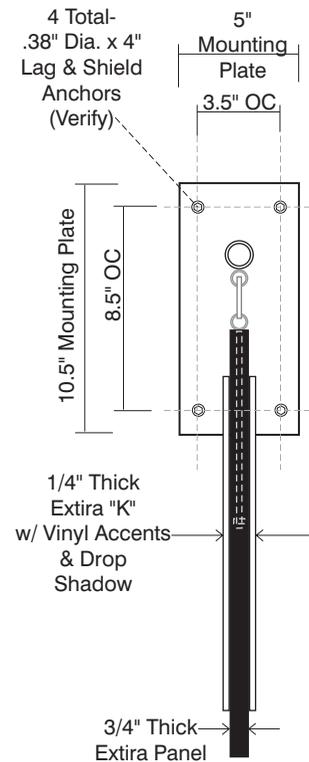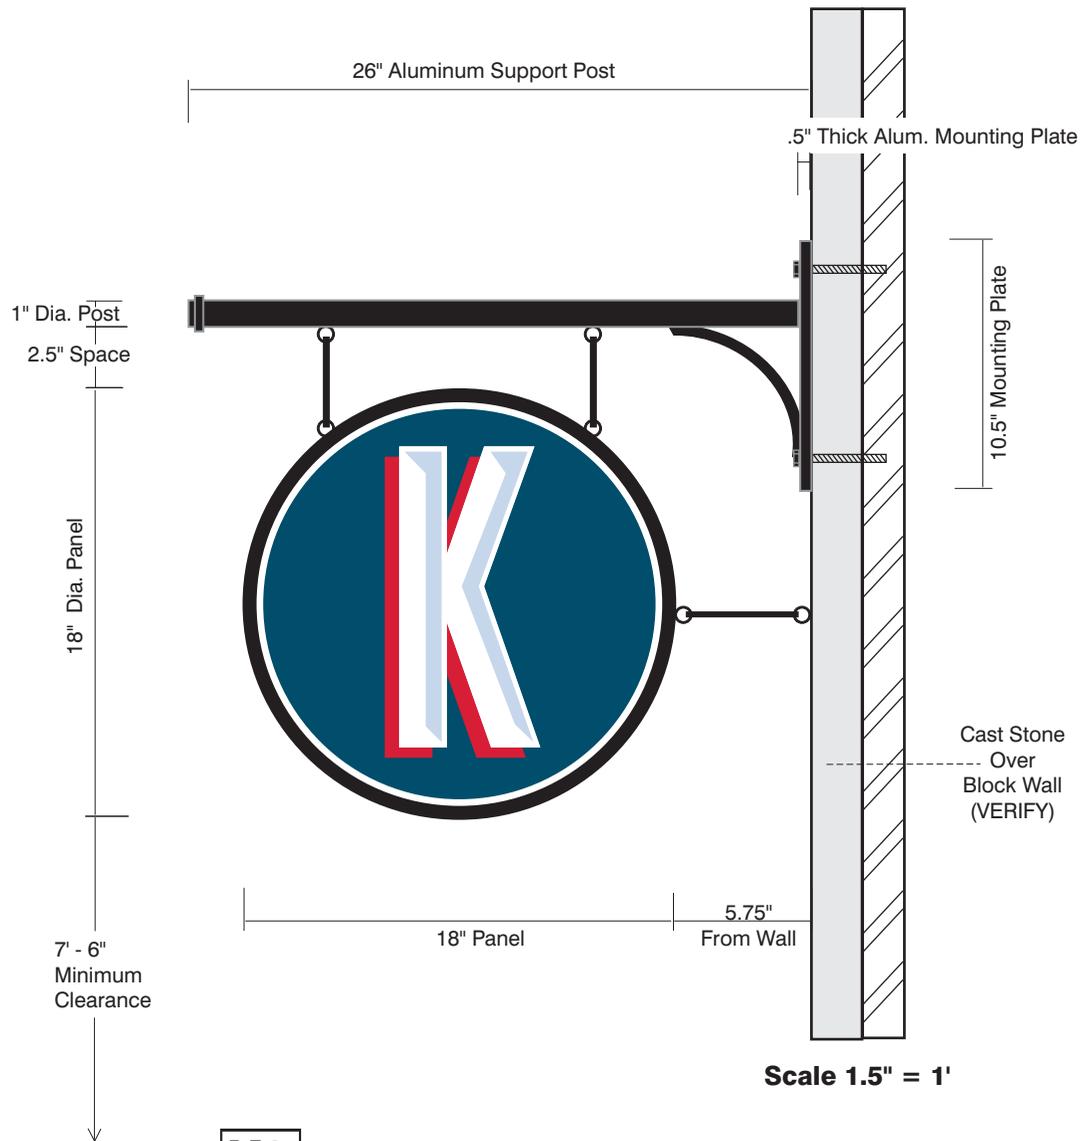

3/4" THICK EXTRIA PANEL; CUT TO SHAPE WITH FINISHED EDGES.
 1/4" THICK CUT OUT EXTRIA "K" IS MOUNTED FLUSH TO BOTH SIDES OF
 PANEL. FLAT APPLIED VINYL ACCENTS & DROP SHADOW APPLIED TO
 BOTH SIDES.

PANEL IS SUSPENDED ON WELDED EYEHOOKS WITH ROD OR LOCKING LINK
 BETWEEN. ADDITIONAL STABILIZING ROD OR CABLE SECURED TO WALL &
 SIDE OF OVAL

BRACKET - 1" DIAMETER SUPPORT POST THRU WELDED TO 1/2" THICK
 ALUMINUM MOUNTING PLATE. CURVED. 38" THICK ALUMINUM SUPPORT
 PIECE ADDED TO BOTTOM OF POST.


PLATE IS MOUNTED FLUSH TO CAST STONE OVER BLOCK WALL WITH 4 TOTAL -
 3/8" DIA. X 4" LAG & SHIELD ANCHORS.

**VERIFY WALL MATERIALS TO CONFIRM MOUNTING METHOD.
 ADDITIONAL BLOCKING ADDED AS NEEDED.**

COLORS-----
 BRACKET & ALL HARDWARE - SATIN BLACK.
 GRAPHICS; AS SHOWN -----




PANEL RETURNS - BLACK

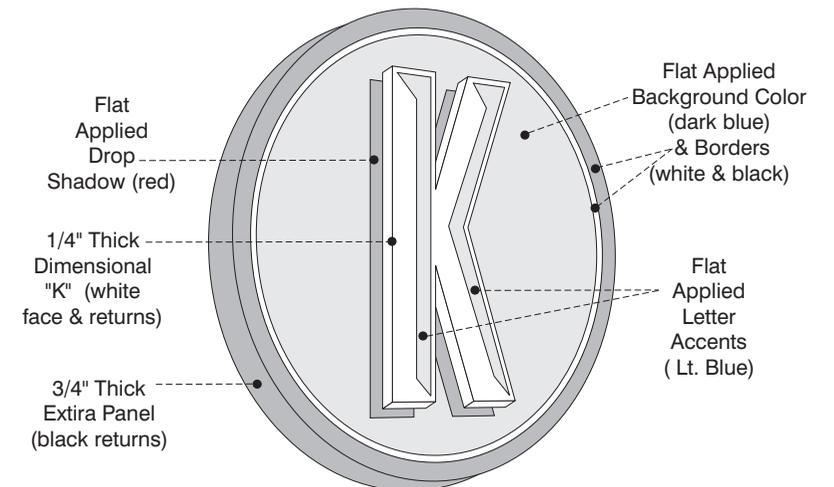

K3 D.F., Non-Illuminated Projecting Blade Sign
2 Total Blade Signs-----

**SOUTH ELEVATION
(E. MAIN ST.)
SCALE 3/16" = 1'**

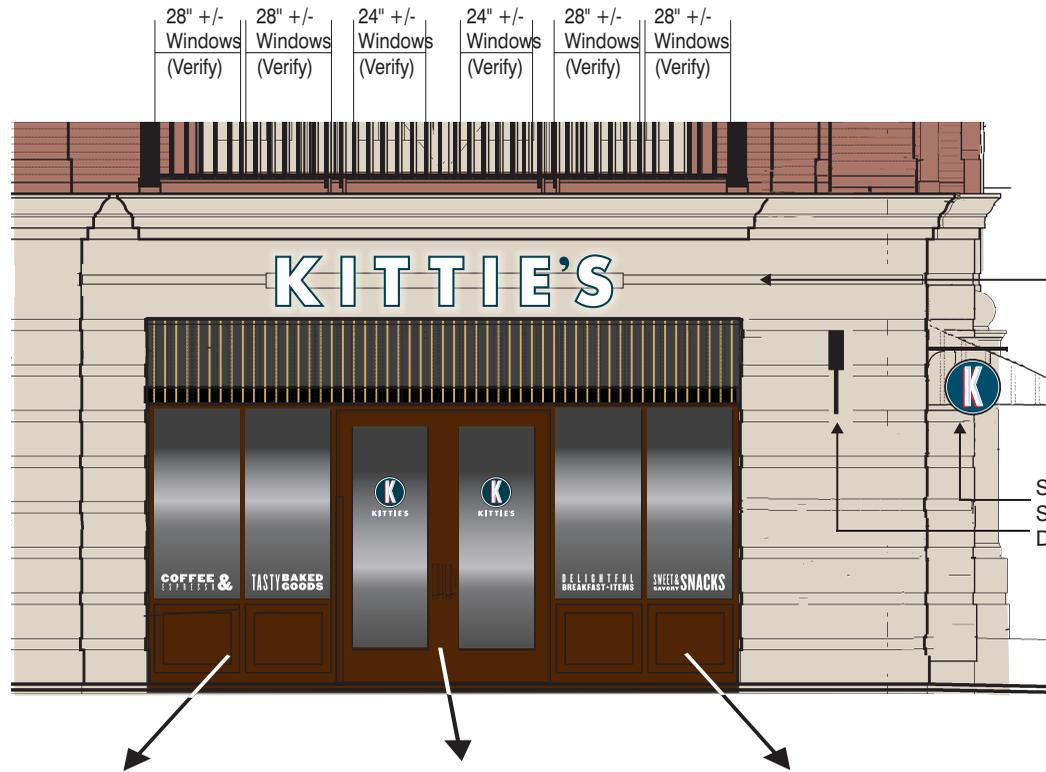

K4 VINYL WINDOW GRAPHICS

6 WINDOWS TOTAL-
HIGH PERFORMANCE FIRST SURFACE VINYL GRAPHICS APPLIED TO STOREFRONT WINDOWS.

COLORS-----
SIDE WINDOWS - WHITE VINYL OVERALL.
DOOR GRAPHICS - WHITE, BLACK, DARK BLUE, LIGHT BLUE & RED; AS SHOWN
DOOR TEXT - WHITE WITH LIGHT BLUE DROP SHADOW

PMS 3035	PMS 277	PMS 199	BLACK	WHITE
Dark Blue	Light Blue	Red		

SIDE WINDOWS

DOOR WINDOWS

SIDE WINDOWS



SCALE 1/2" = 1'



CLIENT APPROVAL _____ DATE _____

PRODUCTION ART REQUIRED
Colors on Printed Documents May Vary

PROJECT NAME THE GRAMERCY / KITTY'S
LOCATION _____
CITY COLUMBUS STATE _____

REVISION 10-4-16 10-7-16
10-14-16

SALES BMS
DESIGN KD
SIZE 14

DATE 9-30-16
SCALE Noted
PROJECT# 16519



S2 SOUTH ELEVATION (E. MAIN ST.) SCALE 3/16" = 1'
ILLUMINATED WALL LETTERS


GRAMERCY BOOKS - SEE "G SERIES" DRAWINGS FOR ADDITIONAL INFORMATION.

LED LIGHT CLUSTERS ARE HOUSED INSIDE EACH SHAPE & EMIT LIGHT FROM BEHIND FOR HALO GLOW.

ALUMINUM CONSTRUCTED LETTERS 3" DEEP.

LETTERS ARE MOUNTED TO COVER PLATE OVER CONCEALED RACEWAY INSIDE WALL RECESS

PRIMARY ELECTRIC BROUGHT TO SITE BY OTHERS.

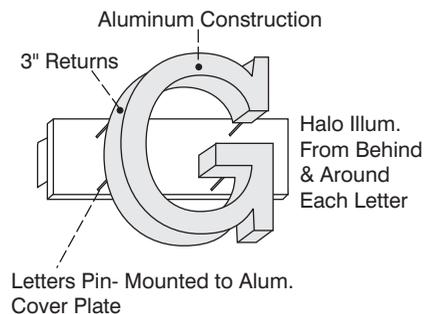

KITTY'S - SEE "K SERIES" DRAWING FOR ADDITIONAL INFORMATION.

LED LIGHT CLUSTERS ARE HOUSED INSIDE EACH SHAPE & EMIT LIGHT FROM BEHIND FOR HALO GLOW.

ALUMINUM CONSTRUCTED LETTERS 3" DEEP.

LETTERS ARE MOUNTED TO COVER PLATE OVER CONCEALED RACEWAY INSIDE WALL RECESS

PRIMARY ELECTRIC BROUGHT TO SITE BY OTHERS.

* APOSTROPHE - NON -ILLUMINATED; 3/4" THICK EXTRA. PIN MOUNTED W/ 1/5" STAND-OFF SPACERS.

