



SmarterGlass

state-of-the-art display solutions

www.smarterglass.com
978 465 6190
sales@smarterglass.com

DLC Display Co., Limited

德爾西顯示器有限公司



MODEL No: DLC1010LZG-T-1

TEL: 86-755-86029824

FAX: 86-755-86029827

E-MAIL: sales@dlcdisplay.com

WEB: www.dlcdisplay.com

Record of Revision

Date	Revision No.	Summary
2015 12 10	1.0	Rev 1.0 was issued

1. Scope

This data sheet is to introduce the specification of DLC1010LZG-T-1 active matrix TFT module. It is composed of a color TFT-LCD panel, driver ICs, FPC, capacitive touch panel and a backlight unit. The 10.1'' display area contains 1024(RGB) x 600 pixels.


2. Application

Digital equipments which need color display, mobile navigator/video systems, tablet/notebook.

3. General Information

Item	Contents	Unit
Size	10.1	inch
Resolution	1024 (RGB) x 600	/
Interface	LVDS	/
Technology type	a-Si TFT	/
Pixel pitch	0.2175x0.2088	mm
Pixel Configuration	RGB stripes	
Outline Dimension (W x H x D)	235.00x144.99x7.12	mm
Active Area	222.72 x 125.28	mm
Display Mode	Normally white, Transmissive	/
Backlight Type	LED	/
Driver IC of CTP	FT5526	/
Weight	TBD	g

4. Outline Drawing

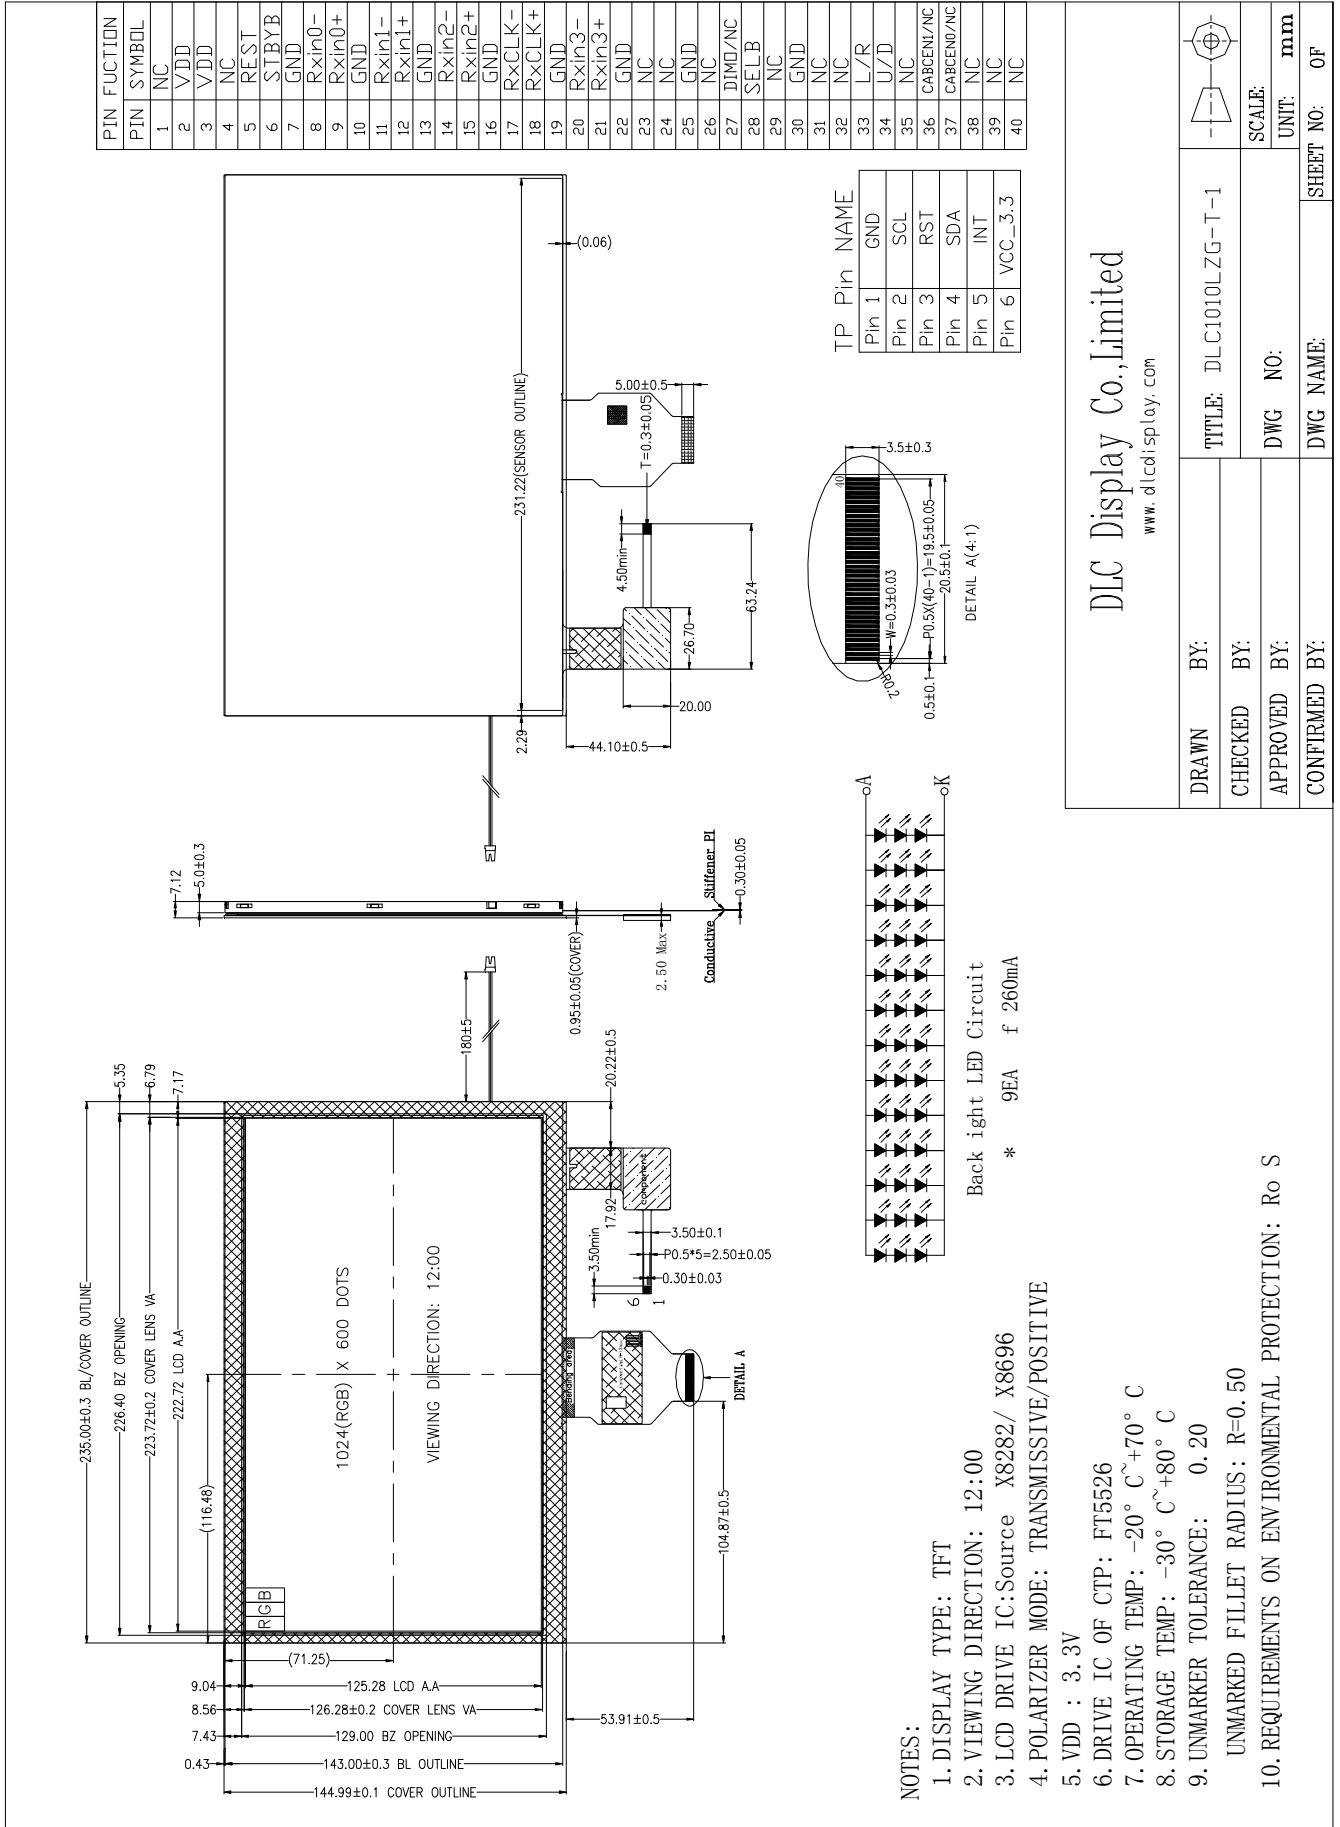

<p>DLC Display Co., Limited www.dlcdisplay.com</p>		<p>DRAWN BY:</p>	<p>TITLE: DLC1010LZG-T-1</p>
		<p>CHECKED BY:</p>	<p>SCALE:</p>
<p>APPROVED BY:</p>	<p>DWG NO:</p>	<p>UNIT: mm</p>	<p>SHEET NO: 0F</p>
<p>CONFIRMED BY:</p>	<p>DWG NAME:</p>		

5. Interface signals

No	Symbol	Description	Remarks
1	NC	No connection	
2	VDD	Power Voltage	
3	VDD	Power Voltage	
4	NC	No connection	
5	REST	Global reset pin	
6	STBYB	Standby mode, Normally pulled high STBYB="1", Normally operation STBYB="0", Timing controller, source driver will turn off, all output are High-Z	
7	GND	Ground	
8	RXIN0-	- LVDS differential data input	
9	RXIN0+	+LVDS differential data input	
10	GND	Ground	
11	RXIN1-	-LVDS differential data input	
12	RXIN1+	+LVDS differential data input	
13	GND	Ground	
14	RXIN2-	-LVDS differential data input	
15	RXIN2+	+LVDS differential data input	
16	GND	Ground	
17	RXCLK-	-LVDS differential clock input	
18	RXCLK+	+LVDS differential clock input	
19	GND	Ground	
20	RXIN3-	-LVDS differential data input	
21	RXIN3+	+LVDS differential data input	
22	GND	Ground	
23	NC	No connection	
24	NC	No connection	
25	GND	Ground	
26	NC	No connection	
27	DIMO/NC	Backlight CABC controller signal output/No connection	
28	SELB	6-bit / 8-bit mode select	Note 2
29	NC	No connection	
30	GND	Ground	
31	NC	No connection	
32	NC	No connection	

33	L/R	Horizontal inversion	Note 4
34	U/D	Vertical inversion	Note 4
35	NC	No connection	
36	CABCEN1/NC	CABC H/W enable/No connection	Note 3
37	CABCEN0/NC	CABC H/W enable/No connection	Note 3
38	NC	No connection	
39	NC	No connection	
40	NC	No connection	


Note 1: The recommended FPC connector model is FH12S-40S-0.5SH manufactured by Hirose.

Note 2: If LVDS input data is 6 bits, SELB must be set to High;
If LVDS input data is 8 bits, SELB must be set to Low.

Note 3: When CABC_EN="00", CABC OFF.
When CABC_EN="01", user interface image.
When CABC_EN="10", still picture.
When CABC_EN="11", moving image.
When CABC off, don't connect DIMO, else connect it to backlight.

Note 4: When L/R="0", set right to left scan direction.
When L/R="1", set left to right scan direction.
When U/D="0", set top to bottom scan direction.
When U/D="1", set bottom to top scan direction.

Note 5: Definition of scanning direction
Refer to the figure as below:

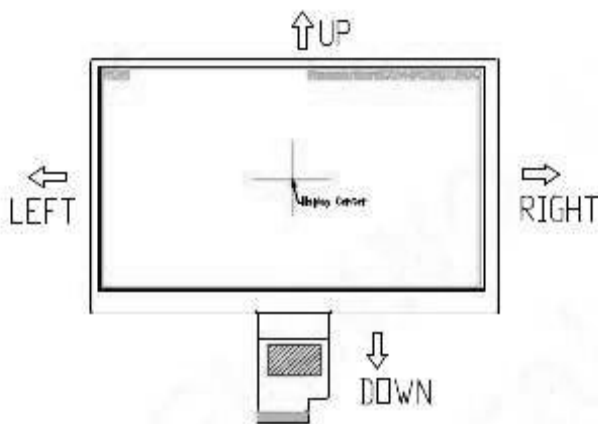

TP signal interface

Pin	Symbol	Description
1	GND	Power ground.
2	SCL	Clock for the data input.
3	RST	Reset pin
4	SDAH	Data input.
5	INT	Interrupt output Pin
6	VCC_3.3	Touch screen supply voltage (3.3 V)

Recommend connector : FH12-6S-0.5SH

6. Absolute maximum Ratings

6.1. Electrical Absolute max. ratings

Parameter	Symbol	MIN	MAX	Unit	Remark
Supply Voltage	VDD	-0.3	5.0	V	

6.2. Environment Conditions

Item	Symbol	MIN	MAX	Unit	Remark
Operating Temperature	TOPR	-20	70	°C	
Storage Temperature	TSTG	-30	80	°C	

6.3. LED Backlight Absolute max. ratings

Item	Symbol	MIN	MAX	Unit	Remark
Forward current	I _{LED}	-	25	mA	For each LED

7. Electrical Specifications

7.1 Electrical characteristics

GND=0V, Ta=25°C

Item	Symbol	MIN	TYP	MAX	Unit	Remark
Supply Voltage	VDD	3.0	3.3	3.6	V	

7.2 LED Backlight

Ta=25°C

Item	Symbol	MIN	TYP	MAX	Unit	Remark
Forward Current	I _F	-	260	-	mA	Between A and K in below circuit.
Forward Voltage	V _F	-	9.6	-	V	
LED lifetime	-	-	25,000	-	Hrs	

8. Command/AC Timing

8.1 Timing Conditions

INPUT SIGNAL TIMING

1AC ELECTRICAL CHARACTERISTICS


.1. 1. TTL Mode AC Electrical Characteristics

Parameter	Symbol	Spec.			Unit	Condition
		Min.	Typ.	Max.		
VDD Power On Slew rate	T_{POR}	-	-	20	ms	From 0V to 90% VDD
GRB pulse width	T_{Rst}	50	-	-	us	DCLK=65MHz
DCLK cycle time	T_{cph}	14	-	-	ns	
DCLK pulse duty	T_{cwh}	40	50	60	%	
VSD setup time	T_{vst}	5	-	-	ns	
VSD hold time	T_{vhd}	5	-	-	ns	
HSD setup time	T_{hst}	5	-	-	ns	
HSD hold time	T_{hhd}	5	-	-	ns	
Data set-up time	T_{dsu}	5	-	-	ns	D0[7:0], D1[7:0], D2[7:0] to DCLK
Data hold time	T_{dhd}	5	-	-	ns	D0[7:0], D1[7:0], D2[7:0] to DCLK
DE setup time	T_{esu}	5	-	-	ns	
DE hold time	T_{ehd}	5	-	-	ns	
Output stable time	T_{sst}	-	-	6	us	10% to 90% target voltage. CL=90pF, R=10K ohm(Cascade)
				3		


DATA INPUT FORMAT

TTL Mode Data Input Format

Vertical Timing

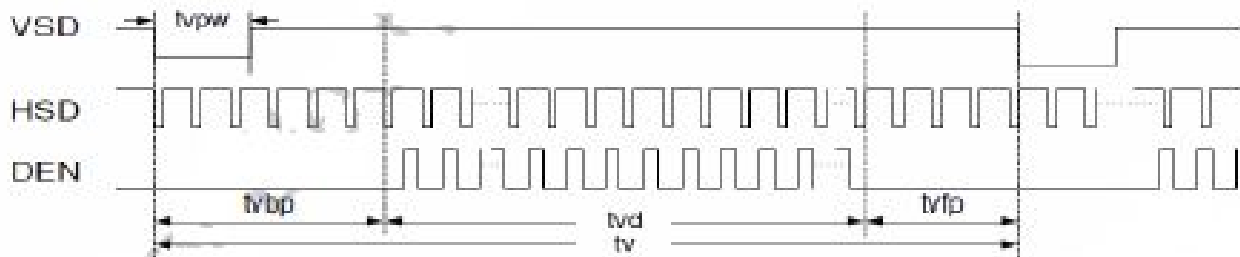

Horizontal Timing

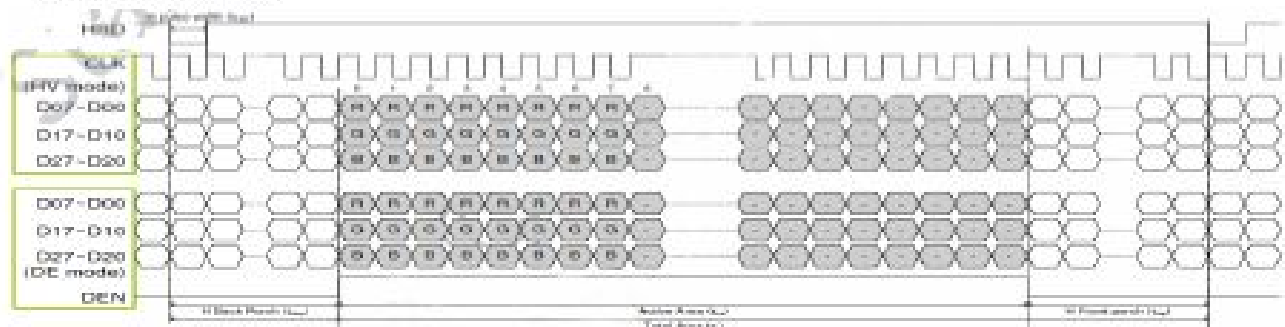

PARALLEL RGB INPUT TIMING TABLE
 .1DE mode


Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
DCLK Frequency	fclk	40.8	51.2	67.2	MHz
Horizontal Display Area	thd	1024			DCLK
HSD Period	th	1114	1344	1400	DCLK
HSD Blanking	thb+ thfp	90	320	376	DCLK
Vertical Display Area	tvd	600			TH
VSD Period	tv	610	635	800	TH
VSD Blanking	tvbp+ tvfp	10	35	200	TH

5.3.2HV mode
Horizontal timing

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
DCLK Frequency	fclk	44.9	51.2	63	MHz
Horizontal Display Area	thd	1024			DCLK
HSD Period	th	1200	1344	1400	DCLK
HSD Pulse Width	thpw	1	-	140	DCLK
HSD Back Porch	thbp	160			DCLK
HSD Front Porch	thfp	16	160	216	DCLK

Vertical Timing

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
Vertical Display Area	tvd	600			TH
VSD Period	tv	624	635	750	TH
VSD Pulse Width	tvpw	1	-	20	TH
VSD Back Porch	tvbp	23			TH
VSD Front Porch	tvfp	1	12	127	TH

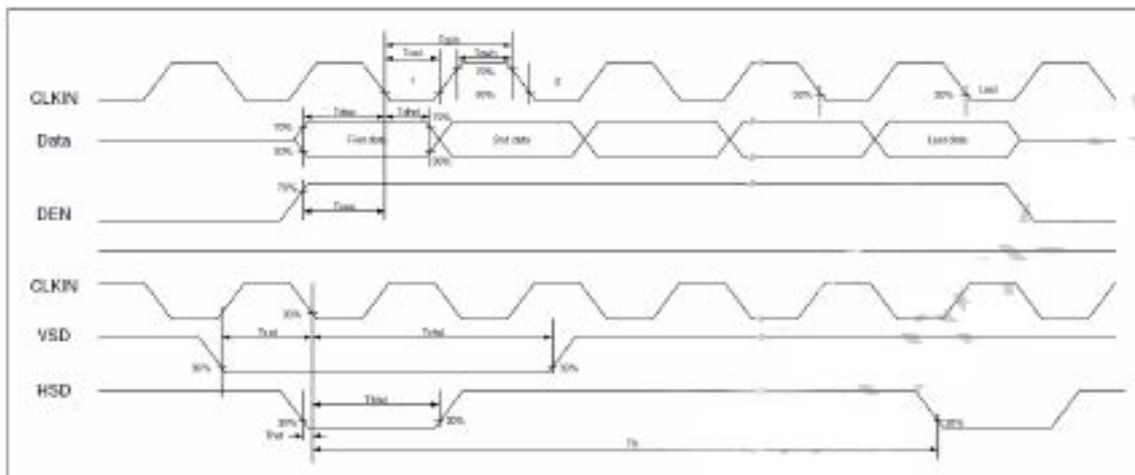
TIMING DIAGRAM
1Input Clock and Data Timing Diagram


8.2 Power Sequence


To prevent the device damage from latch up, the power on/off sequence shown below must be followed.

Power on: VDD, GND → AVDD, AGND → V1 to V14

Power off: V1 to V14 → AVDD, AGND → VDD, GND

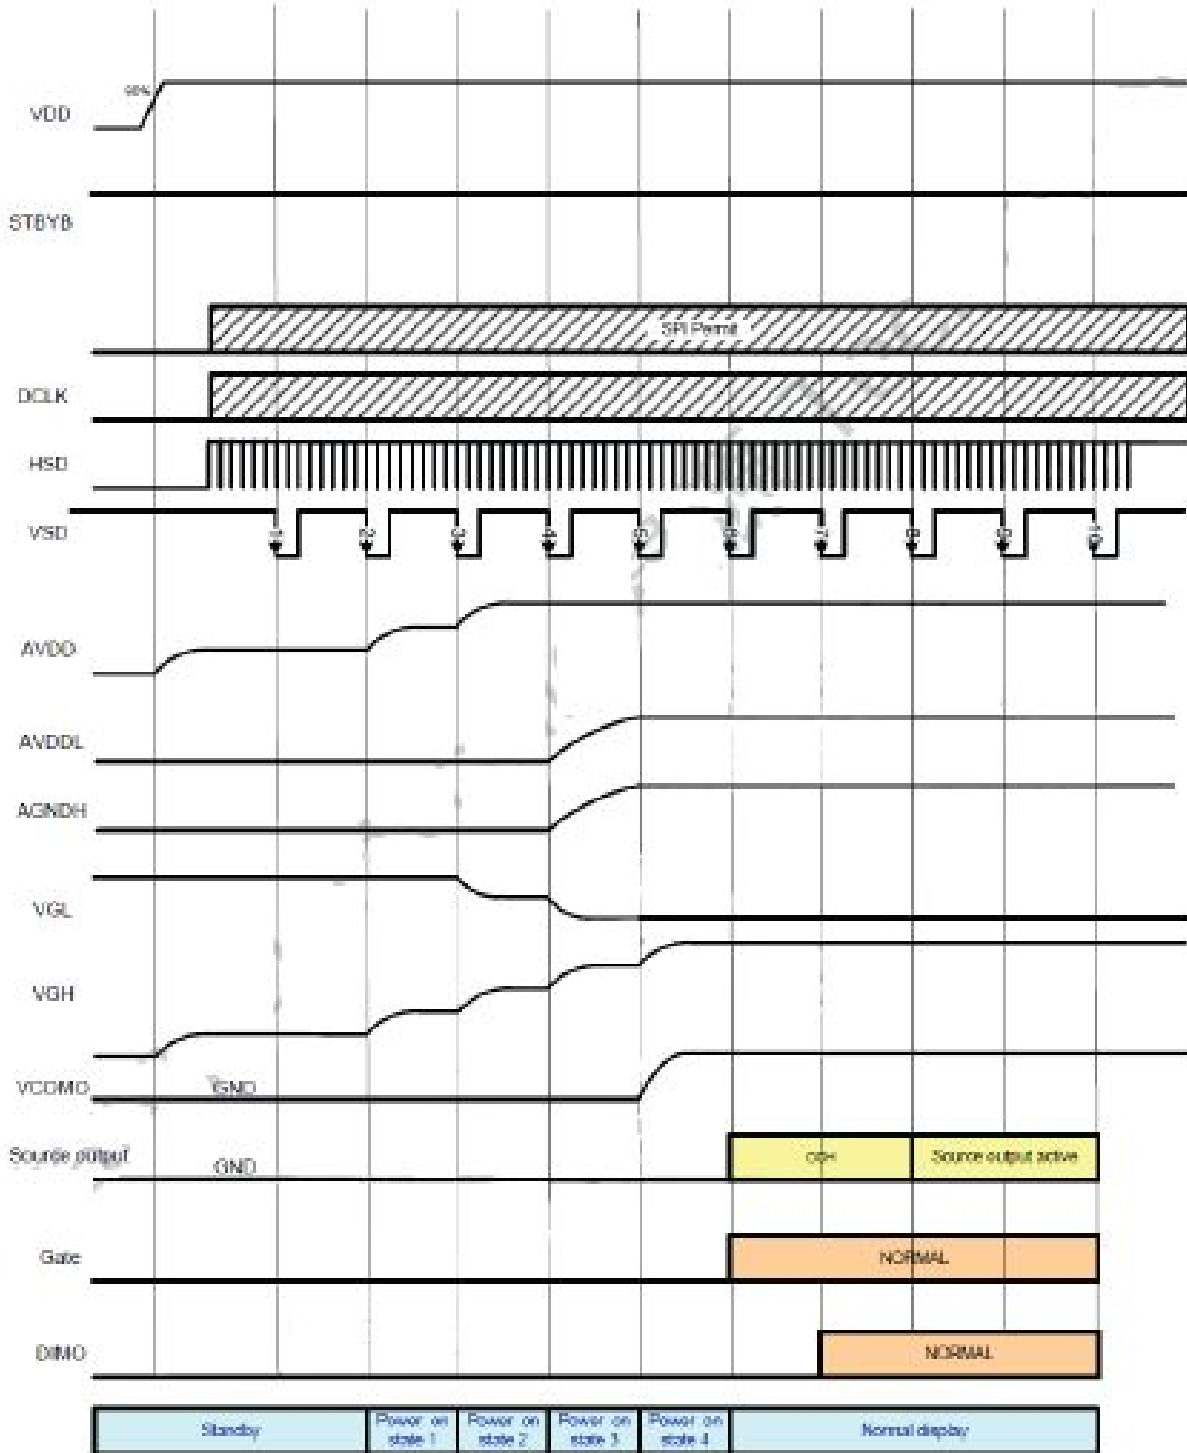

Power on timing sequence

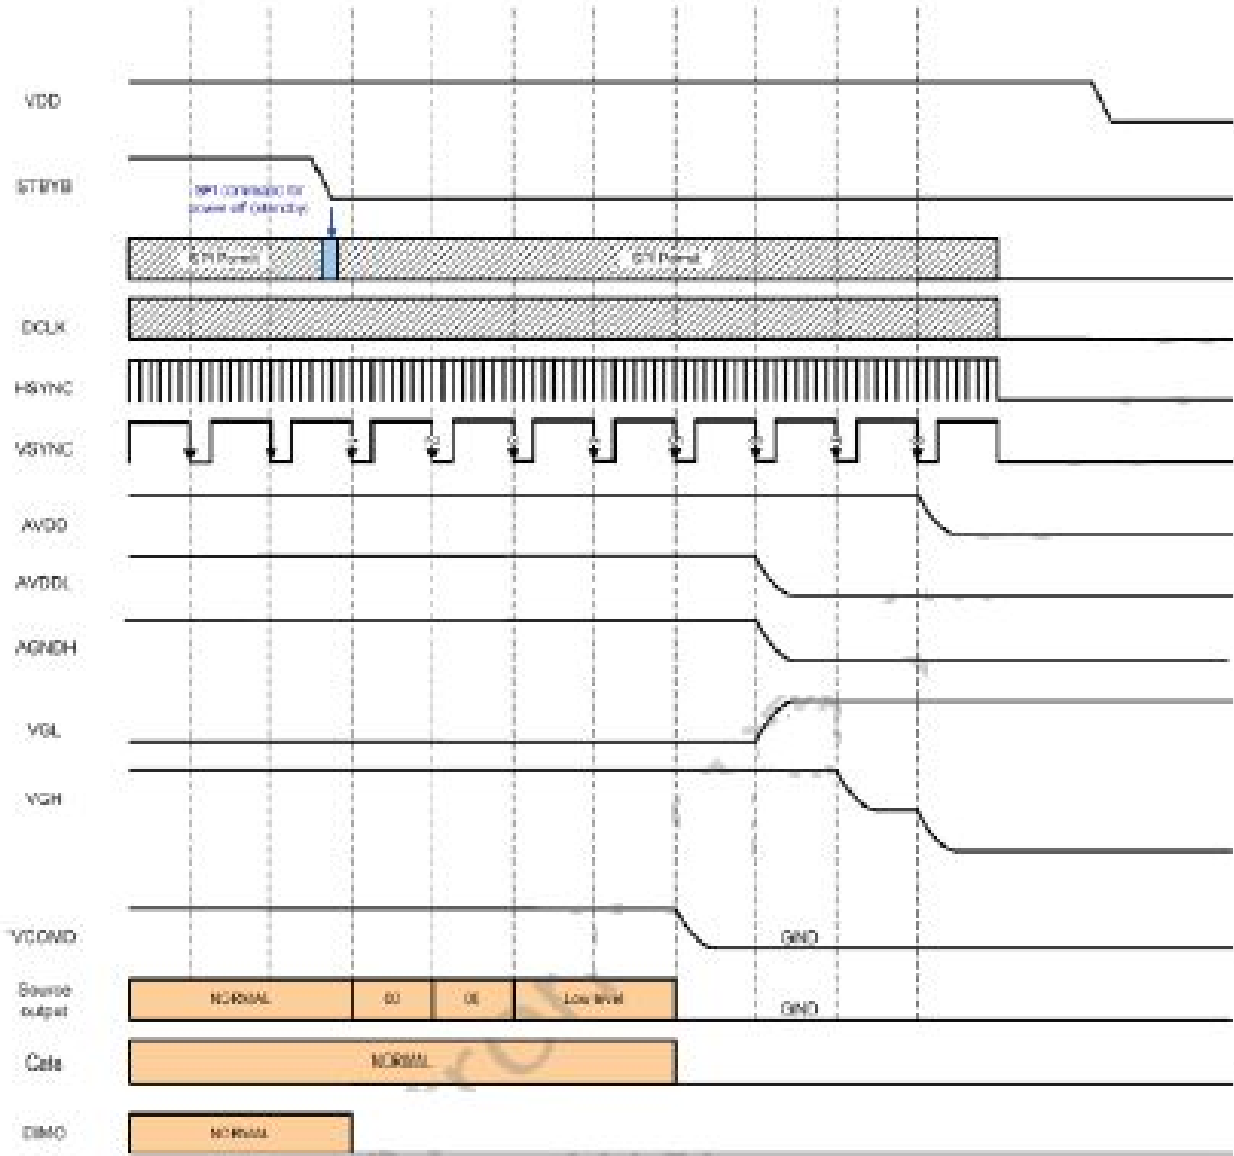

Power off timing sequence

Note: Low level=3FH, when NBW=L (Normally white)
 Low level=00H, when NBW=H (Normally black)

9. Optical Specification


Ta=25°C

Item	Symbol	Condition	Min	Typ.	Max.	Unit	Remark
Contrast Ratio	CR	$\theta=0^\circ$	320	400			Note1 Note2
Response Time	Tr	25°C		25	40	ms	Note1 Note3
	Tf			25	40		
View Angles	θT	$CR \geq 10$		65		Degree	Note 4
	θB			55			
	θL			65			
	θR			65			
Chromaticity	White	x	Brightness is on	0.28	0.31	0.35	Note5, Note1
		y		0.29	0.33	0.36	
Luminance	L		270	320		cd/m ²	Note1 Note6
Uniformity	U		70	75		%	Note1 Note7

Note 1: Definition of optical measurement system.

Temperature = 25°C(±3°C)

LED back-light: ON, Environment brightness < 150 lx

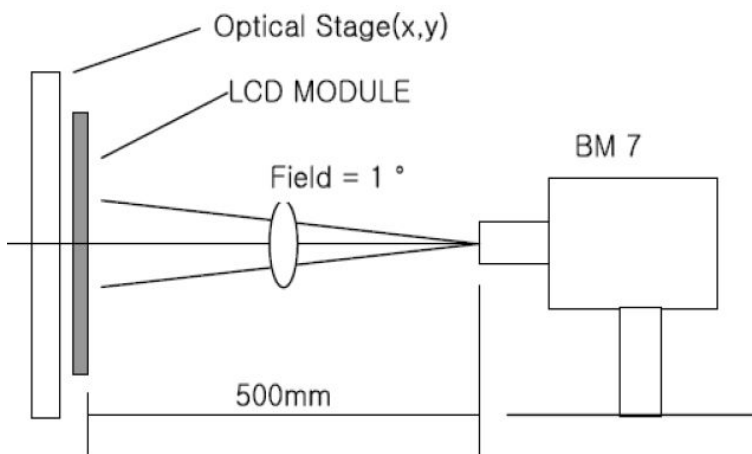


Note 2: Contrast ratio is defined as follow:

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$


Note 3: Response time is defined as follow:

Response time is the time required for the display to transition from black to white (Rise Time, T_r) and from white to black (Decay Time, T_f).

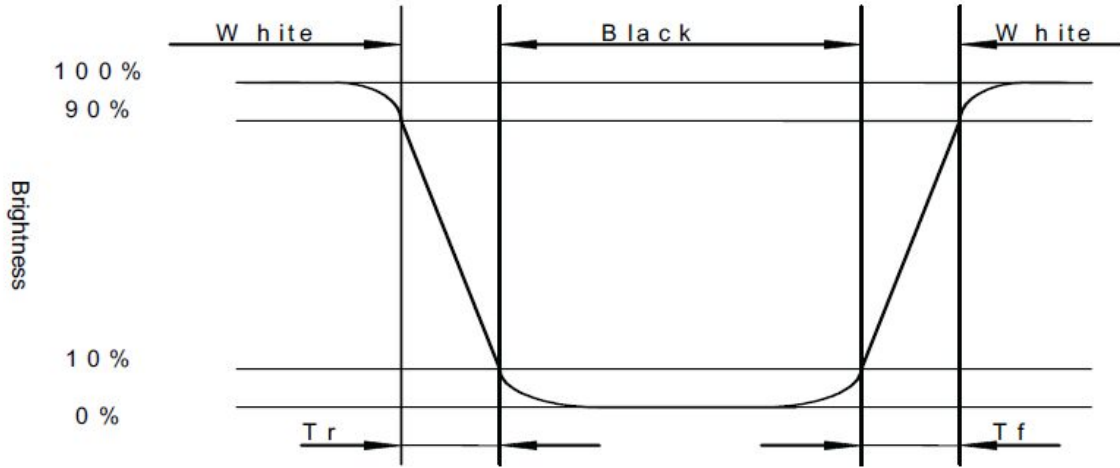


Note 4: Viewing angle range is defined as follow:

Viewing angle is measured at the center point of the LCD.

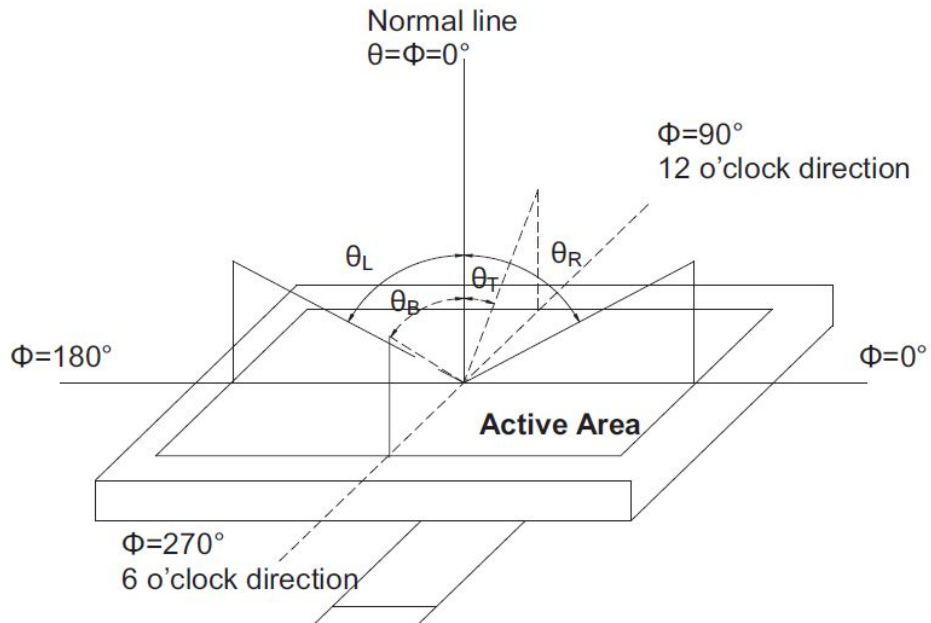

Note 5: Color chromaticity is defined as follow: (CIE1931)

Color coordinates measured at center point of LCD.

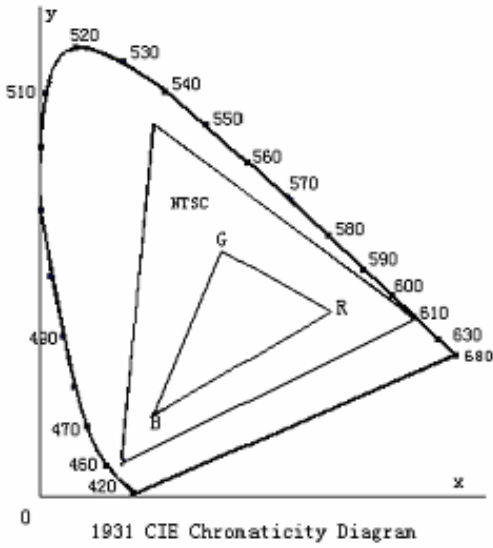

$$S = \frac{\text{area of RGB triangle}}{\text{area of NTSC triangle}} \times 100\%$$

Note 6: Luminance is defined as follow:

Luminance is defined as the brightness of all pixels “White” at the center of display area on optimum contrast.

Note 7: Luminance Uniformity is defined as follow:

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

$$\text{Uniformity (U)} = \frac{\text{Minimum Luminance(brightness) in 9 points}}{\text{Maximum Luminance(brightness) in 9 points}}$$

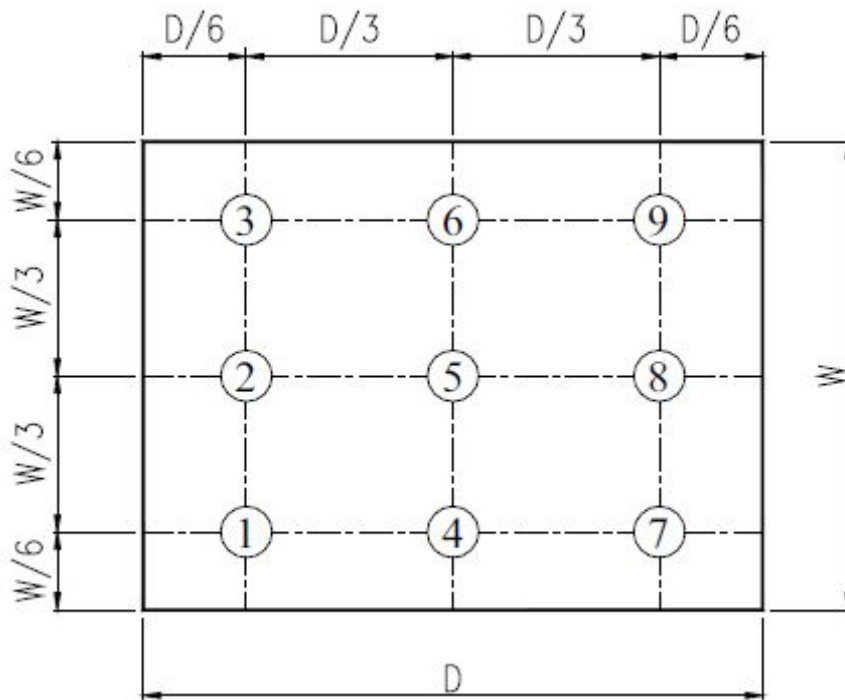


Fig. 2 Definition of uniformity

10. Environmental / Reliability Tests

No	Test Item	Condition	Judgment criteria
1	High Temp Operation	Ts=+70, 120hrs	Per table in below
2	Low Temp Operation	Ta= 20°C, 120hrs	Per table in below
3	High Temp Storage	Ta=+80°C, 120hrs	Per table in below
4	Low Temp Storage	Ta= 30°C, 120hrs	Per table in below
5	High Temp & High Humidity Storage	Ta=+60°C, 90% RH 120 hours	Per table in below (polarizer discoloration is excluded)
6	Thermal Shock (Non operation)	20°C 30 min~+70°C 30 min, Change time:5min, 10 Cycles	Per table in below
7	ESD (Operation)	C=150pF, R=330Ω , 5points/panel Air:±8KV, 5times; Contact:±4KV, 5 times;	Per table in below
8	Vibration (Non operation)	Frequency range:10~55Hz, Stroke:1.5mm Sweep:10Hz~55Hz~10Hz 2 hours for each direction of X.Y.Z.	Per table in below
9	Shock (Non operation)	60G 6ms, ±X,±Y,±Z 3times, for each direction	Per table in below
10	Package Drop Test	Height:80 cm, 1 corner, 3 edges, 6 surfaces	Per table in below

INSPECTION	CRITERION(after test)
Appearance	No Crack on the FPC, on the LCD Panel
Alignment of LCD Panel	No Bubbles in the LCD Panel No other Defects of Alignment in Active area
Electrical current	Within device specifications
Function / Display	No Broken Circuit, No Short Circuit or No Black line No Other Defects of Display

11. Precautions for Use of LCD Modules

11.1 Safety

The liquid crystal in the LCD is poisonous. Do not put it in your mouth. If the liquid crystal touches your skin or clothes, wash it off immediately using soap and water.

11.2 Handling

- A. The LCD and touch panel is made of plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.
- B. Do not handle the product by holding the flexible pattern portion in order to assure the reliability
- C. Transparency is an important factor for the touch panel. Please wear clear finger sacks, gloves and mask to protect the touch panel from finger print or stain and also hold the portion outside the view area when handling the touch panel.
- D. Provide a space so that the panel does not come into contact with other components.
- E. To protect the product from external force, put a covering lens (acrylic board or similar board) and keep an appropriate gap between them.
- F. Transparent electrodes may be disconnected if the panel is used under environmental conditions where dew condensation occurs.
- G. Property of semiconductor devices may be affected when they are exposed to light, possibly resulting in IC malfunctions.
- H. To prevent such IC malfunctions, your design and mounting layout shall be done in the way that the IC is not exposed to light in actual use.

11.3 Static Electricity

- A. Ground soldering iron tips, tools and testers when they are in operation.
- B. Ground your body when handling the products.
- C. Power on the LCD module before applying the voltage to the input terminals.
- D. Do not apply voltage which exceeds the absolute maximum rating.
- E. Store the products in an anti-electrostatic bag or container.

11.4 Storage

- A. Store the products in a dark place at $+25^{\circ}\text{C} \sim 10^{\circ}\text{C}$ with low humidity (40% RH to 60% RH). Don't expose to sunlight or fluorescent light.
- B. Storage in a clean environment, free from dust, active gas, and solvent.

11.5 Cleaning

- A. Do not wipe the touch panel with dry cloth, as it may cause scratch.
- B. Wipe off the stain on the product by using soft cloth moistened with ethanol. Do not allow ethanol to get in between the upper film and the bottom glass. It may cause peeling issue or defective operation. Do not use any organic solvent or detergent other than ethanol.

11.6 Cautions for installing and assembling

Bezel edge must be positioned in the area between the Active area and View area. The bezel may press the touch screen and cause activation if the edge touches the active area. A gap of approximately 0.5mm is needed between the bezel and the top electrode. It may cause unexpected activation if the gap is too narrow. There is a tolerance of 0.2 to 0.3mm for the outside dimensions of the touch panel and tail. A gap must be made to absorb the tolerance in the case and connector.

