


# Y STRAINERS FOR OVAL GEAR METERS

## Y STRAINER – SPECIFICATIONS

<b>Blow-off Fitting:</b>	<b>1/4 inch:</b>	1/4" NPT
	<b>1/2 inch:</b>	1/4" NPT
	<b>3/4 inch:</b>	1/4" NPT
	<b>1 inch:</b>	1/2" NPT
	<b>1-1/4 inch:</b>	1/2" NPT
	<b>1-1/2 inch:</b>	1/2" NPT
	<b>2 inch:</b>	1/2" NPT
<b>Screen Standard:</b>	<b>1/4 inch:</b>	200 mesh
	<b>1/2 inch:</b>	60 mesh
	<b>3/4 inch:</b>	60 mesh
	<b>1 inch:</b>	60 mesh
	<b>1-1/4 inch:</b>	60 mesh
	<b>1-1/2 inch:</b>	60 mesh
	<b>2 inch:</b>	60 mesh
<b>Screen Opening (inch):</b>	<b>1/4 inch:</b>	0.011"
	<b>1/2 inch:</b>	0.032"
	<b>3/4 inch:</b>	0.032"
	<b>1 inch:</b>	0.032"
	<b>1-1/4 inch:</b>	0.032"
	<b>1-1/2 inch:</b>	0.032"
	<b>2 inch:</b>	0.032"
<b>Shipping Weight:</b>	<b>1/4 inch:</b>	4 lbs.
	<b>1/2 inch:</b>	4 lbs.
	<b>3/4 inch:</b>	5 lbs.
	<b>1 inch:</b>	6 lbs.
	<b>1-1/4 inch:</b>	8 lbs.
	<b>1-1/2 inch:</b>	10 lbs.
	<b>2 inch:</b>	18 lbs.

## PART NUMBERS & DIMENSIONS

Part Number	Size	A	B	C
125700-01	1/4 inch:	3-1/4"	2-3/16"	3"
125700-02	1/2 inch:	3-1/4"	2-3/16"	3"
125700-03	3/4 inch:	3-5/8"	2-3/4"	3-1/4"
125700-04	1 inch:	4-1/4"	3-3/16"	4-1/8"
125700-05	1-1/4 inch:	5-1/4"	3-7/8"	5"
125700-06	1-1/2 inch:	6-1/4"	4-3/4"	5-7/8"
125700-07	2 inch:	7-5/8"	6"	8-1/8"

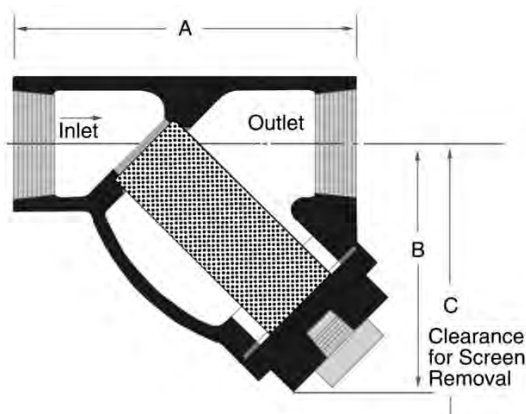

Oval Gear Meters work best with clean fluid, free of debris. GPI carries Y Strainers to fit most models of Oval Gear Meters. These strainers range from 1/4 in. to 2 in. models. All sizes come complete with blow-off and plug.

### Select Your Strainer Size:

1/4 inch    1/2 inch    3/4 inch    1 inch  
 1-1/4 inch    1-1/2 inch    2 inch



### Features and Benefits:

- ✓ Machined, tapered seat ensures a perfect fit for the removable, 316 Stainless Steel screen.
- ✓ 316 Stainless Steel body and all screens are 316 Stainless Steel.
- ✓ All sizes come complete with blow-off and plug. These can be replaced with ball valve for on-line blow-down of particulate.
- ✓ Rated for up to 1480 PSI at 100° F for water, oil or gas.
- ✓ Female NPT threads.