

### Key Features:

- **200V to 420V** Continuous Input Voltage
- 150msec hold time at 660W
- 4200V Isolation Between Input /Output
- Active Input EMI Filtering
- Transient look ahead/cut-off technology
- 6 Voltage output Rails
- Isolated 3.3V aux standby feature
- 1200W Maximum Continuous Power
- 93% Typical Efficiency
- -40°C to 85°C Operating Temperature
- VITA 62 6U Form Factor
- Patent pending **FourRail** thermal interface

## VITA 62 6U ISOLATED 1200W 270V nominal input POWER SUPPLY

This 6U power supply works with **270VDC input** and isolates the input voltage ground from the output voltage ground. The power supply is **conduction cooled**, uses **poly-phase** technology on all voltage rails and can provide up to **1200 watts**. It is suitable for use in **mission critical rugged applications**.

Overview	
P/N	<b>PCI_800.312</b>
Hold Up time	<b>150ms/660W 100ms at +85 deg C.</b>
VITA Compliant	<b>VITA62</b>
Size	<b>6U</b>
Temp. Range	<b>-40 +85 C</b>
Input (AC or DC)	<b>270</b>
Input Range (AC)	
Active EMI Filtering	<b>YES</b>
Power (W, max.)	<b>1200</b>
Efficiency (% , typ.)	<b>93</b>
# of outputs	<b>6</b>

OUTPUTS (Total output not to exceed 990W)	
VS1, V@A	<b>+12@40A</b>
VS2, V@A	<b>+12@40A</b>
VS3, V@A	<b>+5@80A</b>
AUX, V@A	<b>+3.3@20A</b>
AUX, V@A	<b>+12@3A</b>
AUX, V@A	<b>-12@3A</b>

FEATURES	
Over-current Protection	<b>YES</b>
Over-voltage Protection	<b>YES</b>
Over-temperature Protection	<b>YES</b>
Current Sharing	<b>No</b>
Remote Sense	<b>YES</b>
Standard Control	<b>YES, VITA62</b>

COMPLIANCE	
VITA62	<b>YES</b>
MIL-STD-704 (B-F)	<b>YES</b>
MIL-STD-461	<b>YES</b>
MIL-STD-810G	<b>YES</b>
* ESD Protection	<b>YES</b>
* Shock	<b>YES</b>
* Vibration	<b>YES</b>
* Rapid Decompression	<b>YES</b>
* Corrosion Resistance	<b>YES</b>
* Fungus Resistance	<b>YES</b>
* Altitude	<b>YES</b>
* Humidity	<b>YES</b>

INPUT CHARACTERISTICS					
Parameter	Min.	Typ.	Max.	Units	Notes
Absolute Maximum Ratings					
<b>Input Voltage</b>					
- Non-Operating	<b>-60</b>		<b>300</b>	V	Continuous
- Operating	<b>200</b>	<b>270</b>	<b>420</b>	V	Continuous- Reverse input Protection
- Operating Transient Protection			<b>450</b>	V	100us transient, square wave
<b>Isolation Voltage</b>			<b>4200</b>	V	
<b>Operating Temperature</b>	<b>-40</b>		<b>85</b>	C	
<b>Storage Temperature</b>	<b>-55</b>		<b>105</b>	C	
Electrical Characteristics					
<b>Input Voltage</b>					
- Continuous	<b>200</b>	<b>270</b>	<b>420</b>	V	
- Transient			<b>450</b>	V	450V Transient for 40 ms
<b>Under-Voltage Lockout</b>					
- Turn-On Input Voltage Threshold	<b>200</b>	<b>210</b>	<b>220</b>	V	

INPUT VOLTAGE SPIKES SUPPRESSION (Vin Centered)	
+/- 450V, 100 us	MIL-STD-1275D
+/- 490V, 10 us	MIL-STD-461C (CS06); DEF-STAN 61-5
+/- 450V, 5 us	MIL-STD-461C (CS06)
+/- 600V, 10 us	RTCA/DO-160E


OUTPUT CHARACTERISTICS							
Parameter	+12V	+12V	+5V	+3.3V aux	+12V aux	-12V aux	Notes
Output Voltage Set Point, V	12	12	5	3.3	12	-12	Vin = 270VDC
- Drift -40 deg.C to 85degC +/- %	0.1	0.1	0.1	0.1	0.1	0.1	Vin = 270VDC
Output Voltage Trim Range, V	12	12	5	3.3	12	-12	Over Line/load/temp.
	+/- 10%	+/- 10%	+/- 10%	+/- 10%	+/- 10%	+/- 10%	Over Line/load/temp.
Output Voltage Ripple (pk-pk), mV	80	80	40	80	80	80	Full load with 1 uF + 10 uF tantalum capacitor
Operating Current Range, A	0-40	0-40	0-40	0-20	0-3	0-3	<b>1200W</b> Total, combined Output
Over-Voltage Protection, V	13.6	13.6	5.6	3.7	13.6	-13.6	
Current Limit Inception, A	42	42	42	22	3.1	3.1	
Maximum Output Capacitance, mF	10	10	10	10	1	1	

MODULE designed to	
Test Name	Method
Random Vibration	MIL-STD-810, 514.6 - Procedure I, Class V3
Shock	MIL-STD-810, 516.6 - Procedure I, VI, Class OS2
Altitude	MIL-STD-810, 500.5 - Procedure I, II, III
Fungus Resistance	MIL-STD-810, 508.6
Corrosion Resistance	ASTM G85, Annex A4
Humidity	MIL-STD-810, 507.5 - Procedure II
High Temperature	MIL-STD-810, 501.5 - Procedure I, II
Low Temperature	MIL-STD-810, 502.5 - Procedure I, II
Temperature Cycling	MIL-STD-202, 107 - Class C4
ESD	EN61000-4-2, Level 4; 15kV Air Discharge


## RELIABILITY CHARACTERISTICS

Calculated MTBF per MIL-HDBK-217F (GB) at 70 deg C. 4.1 280.000 Hrs.  
Calculated MTBF per MIL-HDBK-217F (GM) at 70 deg C.0.92 280.000 Hrs.

**Block Diagram:**

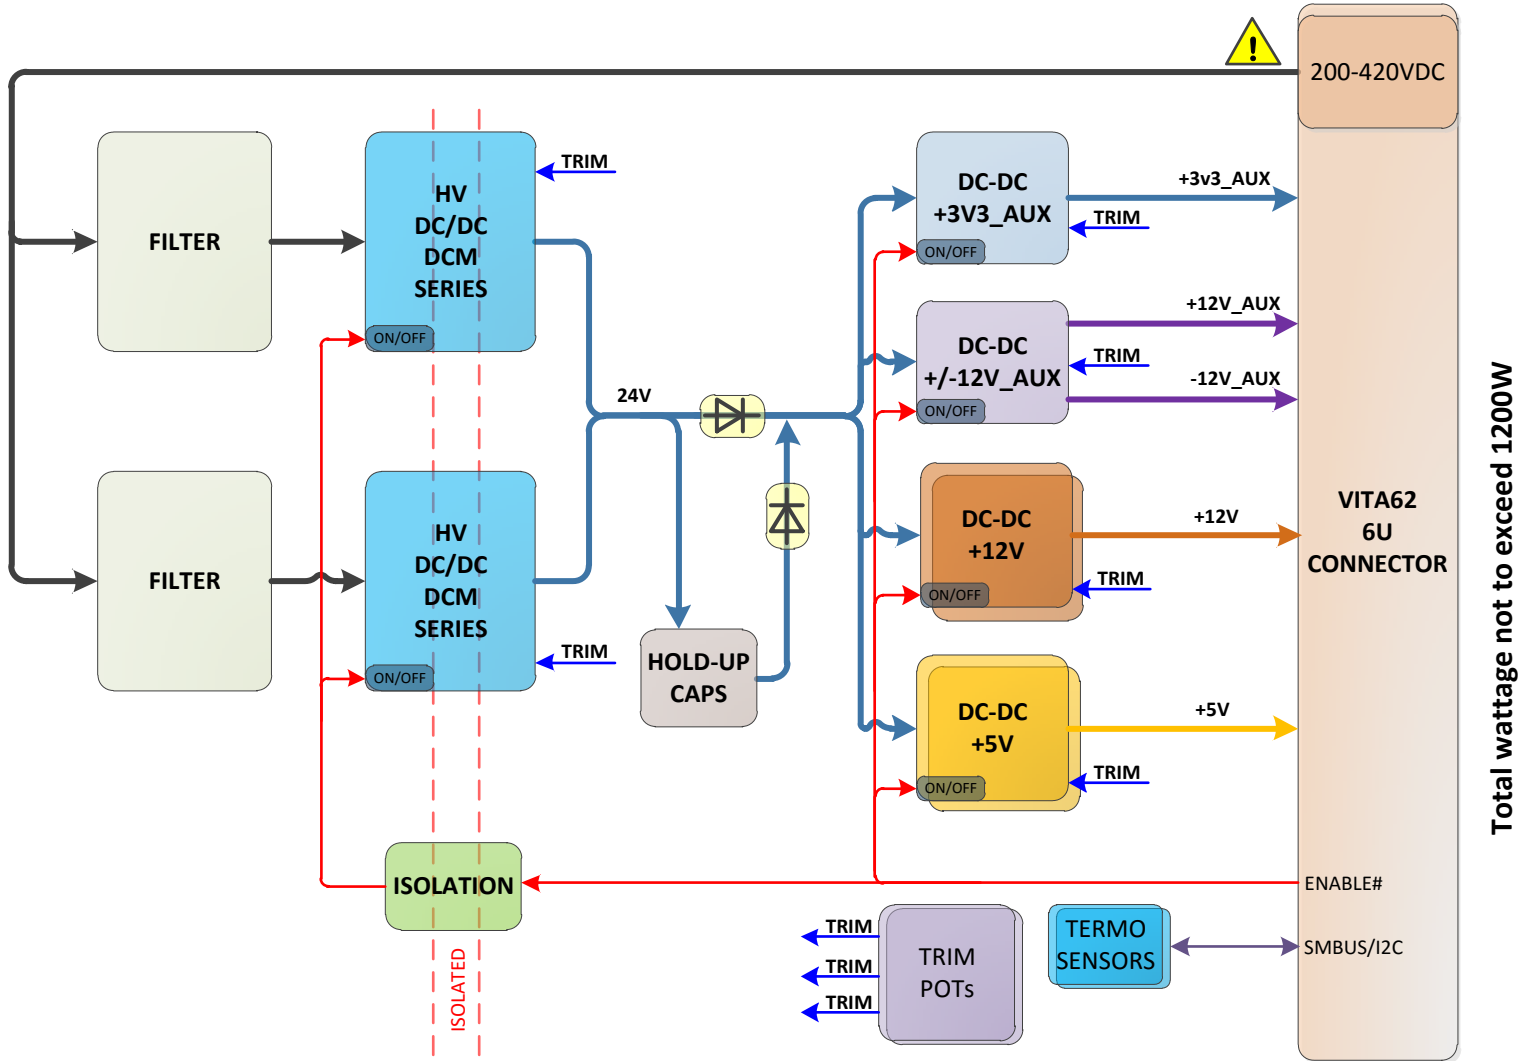

Total wattage not to exceed 1200W

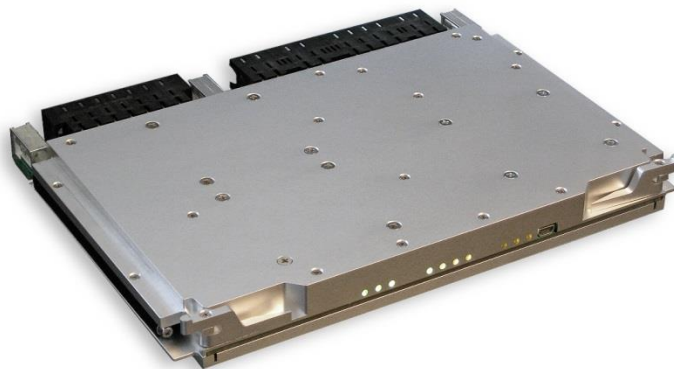

Pin-out: **As per VITA 62 specification**

Mechanical Dimensions: **As per VITA 62 specification (1" pitch)**

**ORDERING INFORMATION:**

**PCI\_800.312**

6U VITA 621200W 270VDC Isolated Rugged Power Supply

**PCI\_800.312\_C**

Version with Conformal Coating

Release\_February\_17\_2016