

Safety-related service instruction BC Blac Jac XP

Step 1:

Loosen the molded padding of the backplate. The molded packing is affixed by a Velcro fastener at the backplate.

Step 2:

Pull out the strap of the shoulder strap.



Step 3:

Thread the belt-stopper on the shoulder strap.

Step 4:

Thread the strap in the backplate beginning on the top of the backplate passing the first slot and then bottom-up passing the third slot.


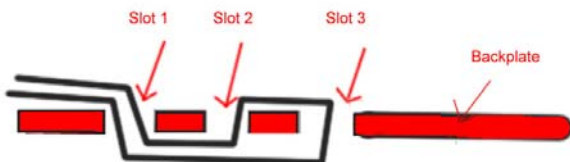


Illustration: Step 4 and 5

Step 5:

Thread the strap through the second slot top down and afterwards bottom up through slot one.

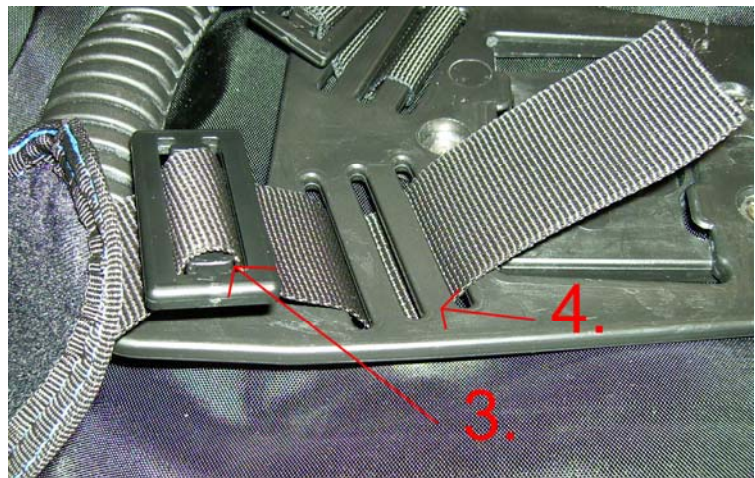

Step 6:

Thread the strap in the belt stopper and tighten the strap.

Repeat the procedure step 1 to 6 at the other shoulder strap.

