



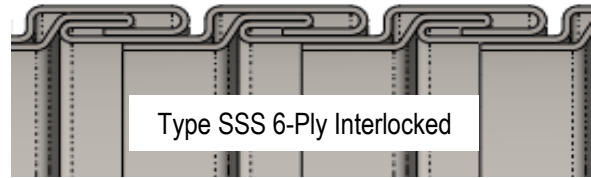

**INTRODUCING OE GRADE FLEX HOSE PRECUTS
NOW AVAILABLE FROM NELSON GLOBAL PRODUCTS**

- 4" & 5" Diameters – Individually Boxed
- 12", 15", 18", 21", & 24" Lengths
- Extension Strap Insures Proper installation Length

THE FINEST INTERLOCKED FLEX ON THE MARKET!

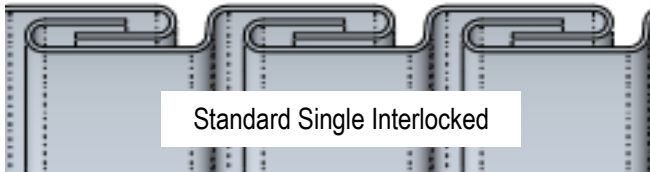

This unique long-life 304 Stainless flex hose produced by Westfalia, is OE Grade low-emission, & offers excellent lateral & torsional movement properties. It is also proudly made in the USA.

| Diameter: | Length: | Part #: |
|-----------|---------|----------|
| 4" ID | 12" | TL310008 |
| 4" ID | 15" | TL310009 |
| 4" ID | 18" | TL310010 |
| 4" ID | 21" | TL310011 |
| 4" ID | 24" | TL310012 |
| 5" ID | 12" | TL310013 |
| 5" ID | 15" | TL310014 |
| 5" ID | 18" | TL310015 |
| 5" ID | 21" | TL310016 |
| 5" ID | 24" | TL310017 |



NOTE: This flex hose is constructed from 304 Stainless. It is NOT intended to be cut to a different length – it is 6-Ply construction & will unravel if cut or trimmed. The extension strap prevents the flex from over-extending, & stops it at the “relaxed” position. At this proper extension, the flex can compress & extend, as well as twist to allow for any normal movement.



Nelson Global Products NGP
1560 Williams Drive
Stoughton, WI 53589

©2017 Nelson Global Products, Inc.

www.nelsonglobalproducts.com