



L3-01 DECIDUOUS TREE PLANTING DETAIL
SCALE: NOT TO SCALE

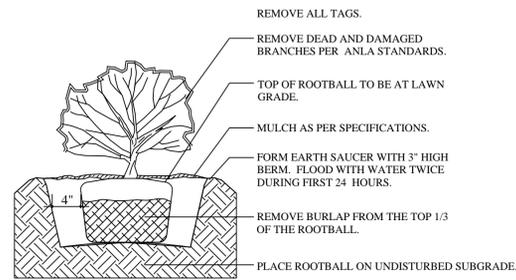


L3-03 SHRUB PLANTING DETAIL
SCALE: NOT TO SCALE

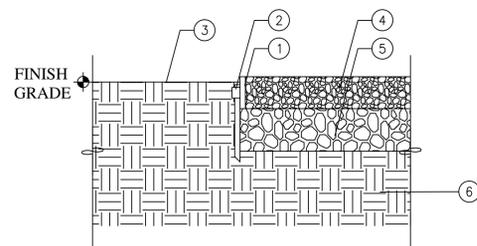


- KEY**
- ① RYERSON STEEL EDGING, 1/2" X 4", SET 1/2" ABOVE FINISH GRADE IN PLANTER
 - ② 12" STEEL STAKE AT 18" O.C. MAX.
 - ③ ADJACENT PLANTING AREA OR SOD, HOLD GRADE 2" BELOW FINISH ELEVATION OF PAVING, SLOPE AWAY FROM PAVING.
 - ④ BRASSFIELD FINES DECORATIVE AGGREGATE MIN. 3" THICK, TYP. SAMPLE TO BE SUBMITTED TO LANDSCAPE ARCHITECT, FOR APPROVAL.
 - ⑤ COMPACTED #57 GRAVEL BASE, 4" MIN. THICKNESS, TYP.
 - ⑥ COMPACTED SUBGRADE, TYP.

L3-05 DECORATIVE AGGREGATE PAVING - EDGE @ PLANTER
SCALE: NOT TO SCALE

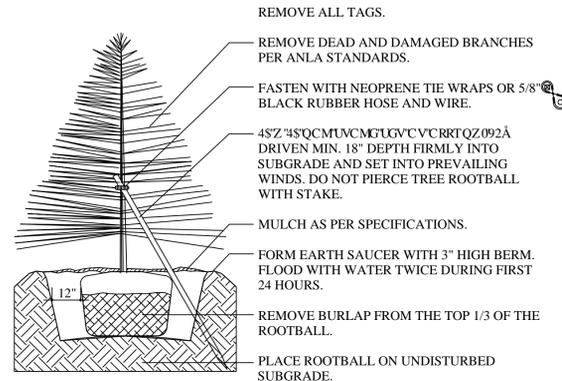

L3-02 CONIFEROUS TREE PLANTING DETAIL
SCALE: NOT TO SCALE

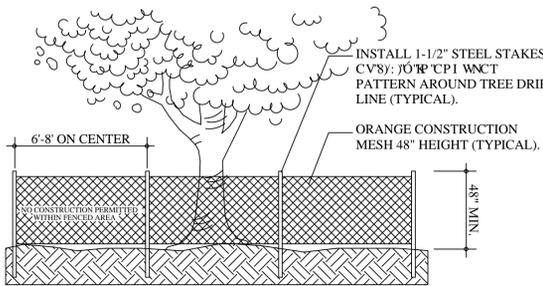

L3-04 TREE PROTECTION DETAIL
SCALE: NOT TO SCALE

NOTES:

ALL PLANT MATERIALS TO COMPLY WITH THE LATEST EDITION OF AMERICAN STANDARD FOR NURSERY STOCK BY AMERICAN NURSERY AND LANDSCAPE ASSOCIATION, AND BE GUARANTEED FOR A PERIOD OF ONE (1) YEAR FROM INSTALLATION DATE.

MULTI-STEM TREES PLANTED IN WINDY CONDITIONS SHALL BE STAKED TO THE LARGEST BRANCHES WITH 2 OR 3 STAKES WITH WIRE AND RUBBER HOSE OR APPROVED MATERIALS.

LANDSCAPE CONTRACTOR IS TO VERIFY LOCATION OF ALL UNDERGROUND UTILITIES AND RECEIVE APPROVAL FROM GC OR SITE SUPERVISOR, IF NECESSARY, TO MAKE CHANGES IN PLANT LOCATIONS.

MINOR ADJUSTMENTS TO THE PLANT LOCATIONS ARE TO BE MADE IN THE CASE OF ANY CONFLICTS WITH PROPOSED UTILITIES.

LANDSCAPE CONTRACTOR MUST COORDINATE WITH GENERAL CONTRACTOR AND OTHER SITE OPERATIONS.

PLANTING BEDS SHALL BE TREATED WITH A PRE-EMERGENT HERBICIDE APPLIED AT PRODUCT SPECIFIED RATE UNLESS OTHERWISE NOTED.

BED EDGE SHALL BE SMOOTH, CONSISTENT 4-1/2" DEEP AND HAND CUT. EDGES TO BE LOCATED BETWEEN ALL BEDS (INCL. TREES) AND LAWN AREAS.

GENERAL CONTRACTOR IS RESPONSIBLE FOR FINISHED GRADES. LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR FINE GRADING AND TO PROVIDE 4" OF AMENDED TOPSOIL FOR PLANTING BEDS.

BEDS ARE TO BE GRADED SMOOTH AND FREE OF SOIL CLODS AND STONES. ALL PLANTING BEDS AND FREE STANDING TREES TO BE MULCHED WITH 2" HARDWOOD MULCH AT TIME OF NEW PLANTING. MULCH IS NOT TO BE MOUNDED UP AROUND TRUNKS OF TREES. KEEP MULCH 2" AWAY FROM MAIN STEM OF PLANT OR TRUNK OF TREES. PLANTING BEDS TO BE MAINTAINED WITH NO MORE THAN A 2" MULCH DEPTH MAXIMUM.

PLANT QUANTITIES HAVE BEEN PROVIDED FOR CONVENIENCE ONLY; THE LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR HIS OWN "TAKE OFFS".

ALL PLANTS ARE TO BE REMOVED FROM CONTAINERS, CAGES, AND NON-BIODEGRADABLE MATERIALS. ALL TREES TO BE STAKED AND WRAPPED WITH ASPHALTIC WRINKLE KRAFT TREE WRAP.

PLANTINGS SHALL BE FERTILIZED UPON INSTALLATION. RECOMMENDED FERTILIZER IS TO BE MIXED WITH BACKFILL AT PRODUCT SPECIFIED RATE.

SOD ALL AREAS INDICATED ON PLAN. SEED ALL AREAS INDICATED ON PLAN AND BEYOND PROPERTY LINES DISTURBED DURING CONSTRUCTION.

SEED IS TO BE LESCO TEAM-MATES PLUS MIX (LESCO, INC. 1-800-321-5325) OR EQUAL. SOW AT A RATE OF 8# PER 1000 SQ. FT.

ALL ORGANIC MATTER AND DEBRIS ARE TO BE REMOVED FROM THE SITE BY THE LANDSCAPE CONTRACTOR. LAWN AREAS AND BEDS SHOULD BE FREE OF STONES GREATER THAN 2".

THE LANDSCAPE CONTRACTOR IS TO COORDINATE WITH IRRIGATION CONTRACTOR, AND ALSO WITH SITE SUPERVISOR REGARDING IRRIGATION INSTALLATION.

TRANSPLANT NOTE:
ALL PLANTS TO BE TRANSPLANTED ARE TO BE DUG, BALLED, AND BURLAPED.

TREE PROTECTION NOTE:
ANY TREE TO REMAIN WITHIN CONSTRUCTION LIMITS IS TO BE PROTECTED AT DRIP LINE. SEE TREE PROTECTION DETAIL.

THE LANDSCAPE CONTRACTOR SHALL SUBMIT A ONE (1) YEAR MAINTENANCE CONTRACT FOR CONSIDERATION BY THE OWNER. CONTRACT SHALL BE SEPARATE FROM THE INSTALLATION CONTRACT.

EXISTING PRESERVED PLANT MATERIAL
-PRUNE OUT DEAD MATERIAL, THIN & REDUCE SIZE BY 18"

PROJECT DATE: 06/05/15

APPROVAL DATE:

CONSTRUCTION BID

ISSUE DATE: -

PERMIT ISSUE:

REVISIONS

1.-06/27/15

-PHASE 1 DELINEATION

2.-07/01/15

-BTPG APPROVAL

3.-

-

SCHIEBER & ASSOCIATES
a studio of landscape architecture & horticulture
2807B DELMAR DRIVE
BEXLEY, OHIO 43209
(614) 754-8752

Prepared for
**BEXLEY UNITED
METHODIST CHURCH**
2657 EAST BRAOD STREET
BEXLEY, OHIO 43209

**SITE LANDSCAPE
IMPROVEMENT SITE**

DATE:

06/05/2015

SEAL:

PROJ. NO: 15-05C003